



8 7 6 5 4 3 2 1


D  
C  
B  
A

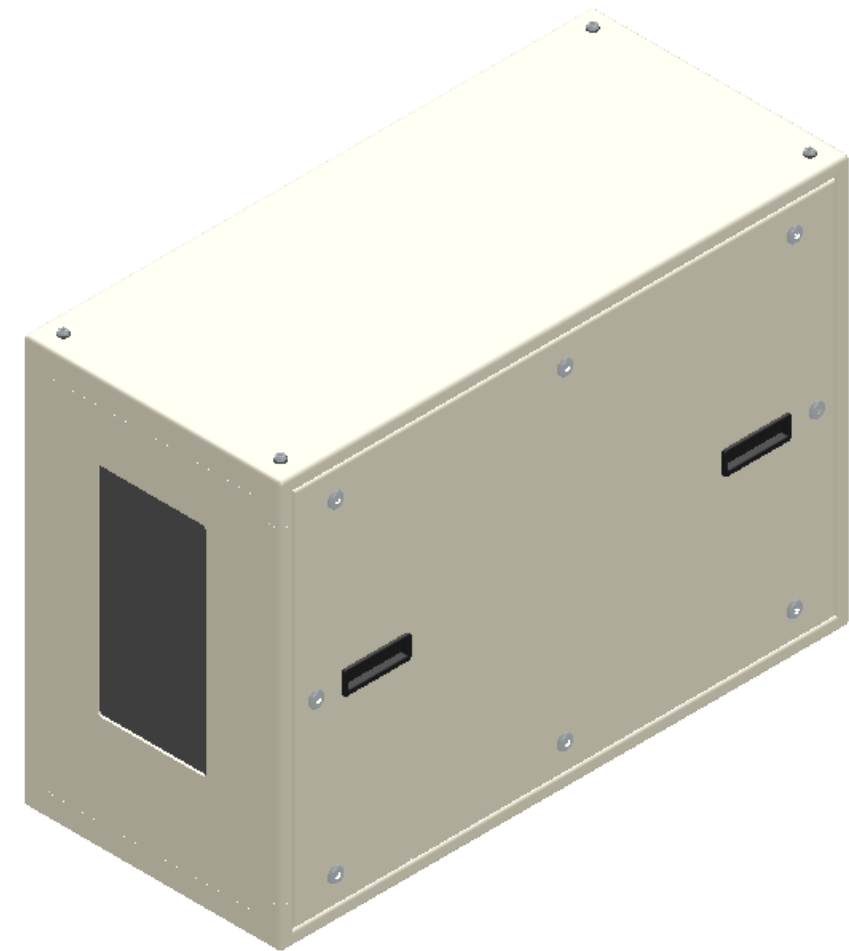


Rigging Points:  
4 x M10-1.5 Top  
and Bottom

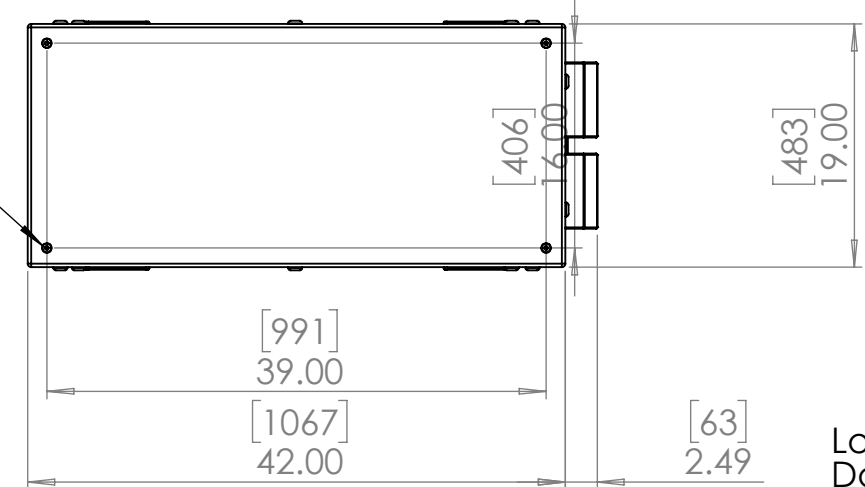


Optical Grade  
Tempered Port  
Glass

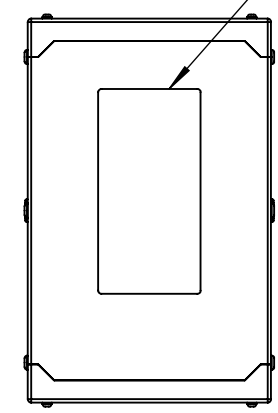

Lockable Back  
Door for Lamp  
Access

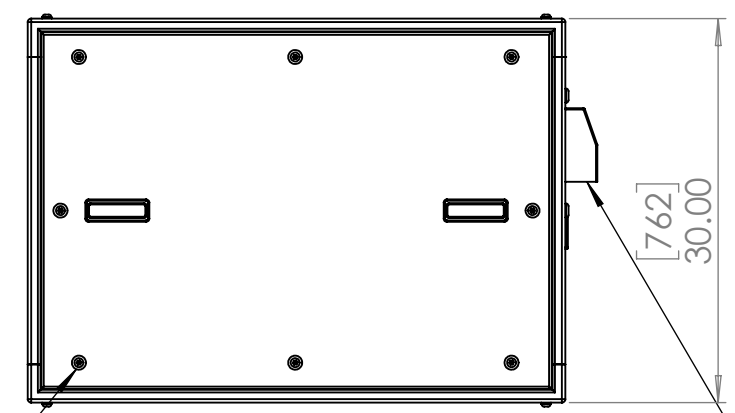


Exhaust Cowl  
& Insect  
Screen

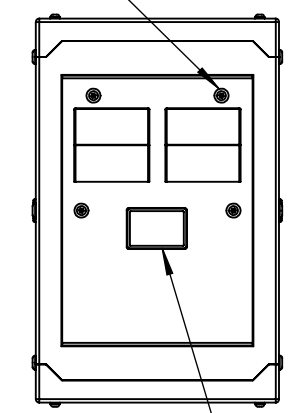

DEC User  
Interface

Removable  
Locking Side  
Panels

Standard Salt  
Fog Inlet  
Filters

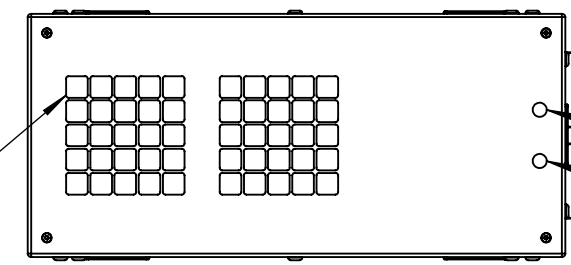

Signal Conduit Entry  
Power Conduit Entry  
(US 3/4", Int PG21)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± INTERPRET GEOMETRIC TOLERANCING PER:		NAME	DATE	
MATERIAL		DRAWN	TB	
FINISH		CHECKED		TITLE: Blizzard 52.150 Portrait Enclosure
DO NOT SCALE DRAWING		ENG APPR.		SIZE DWG. NO. REV <b>B</b> 52.150.Px.xx 05
		MFG APPR.		SCALE: 1:10 SHEET 1 OF 1
		Q.A.		
		COMMENTS:		