
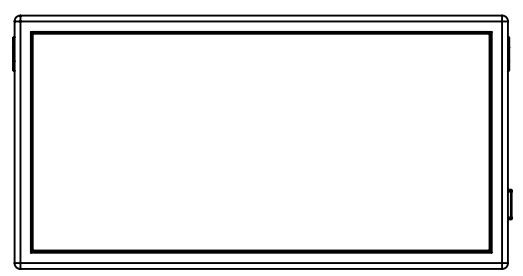
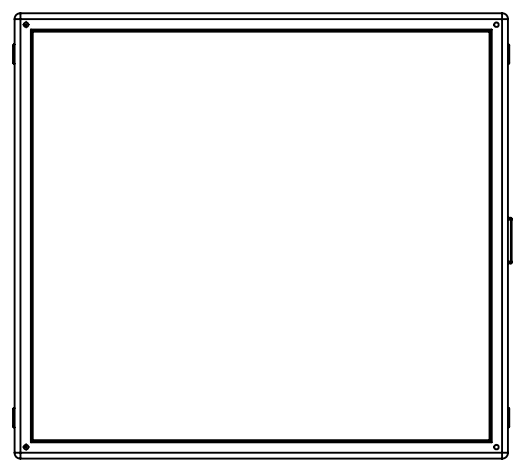



8 7 6 5 4 3 2 1

D C B A

Optical Grade Tempered Port Glass  
Lockable Latches front and back doors



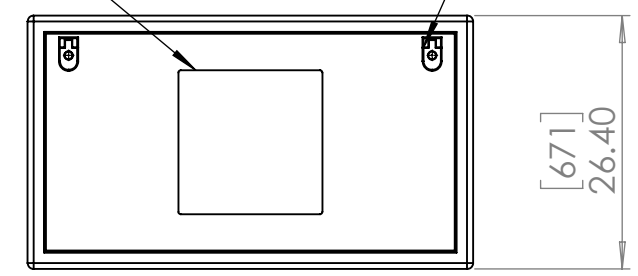


Fan door opens when fan is running

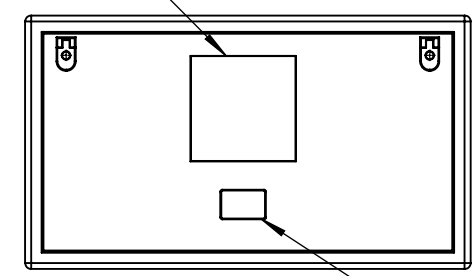



DEC4 User Interface

Inlet Filter

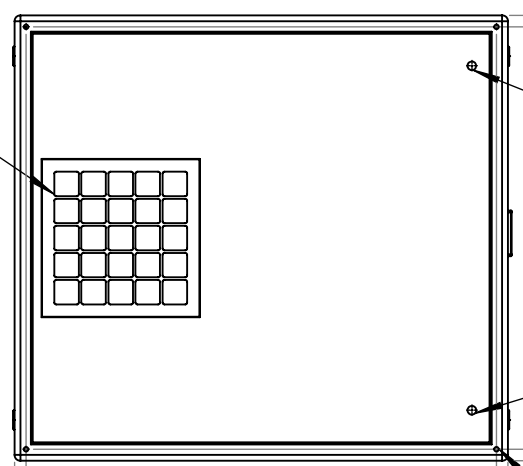

Power and Signal Conduit Entries, PG21/US 3/4"

M12-1.75 x 38 Threaded mounting holes, top and bottom

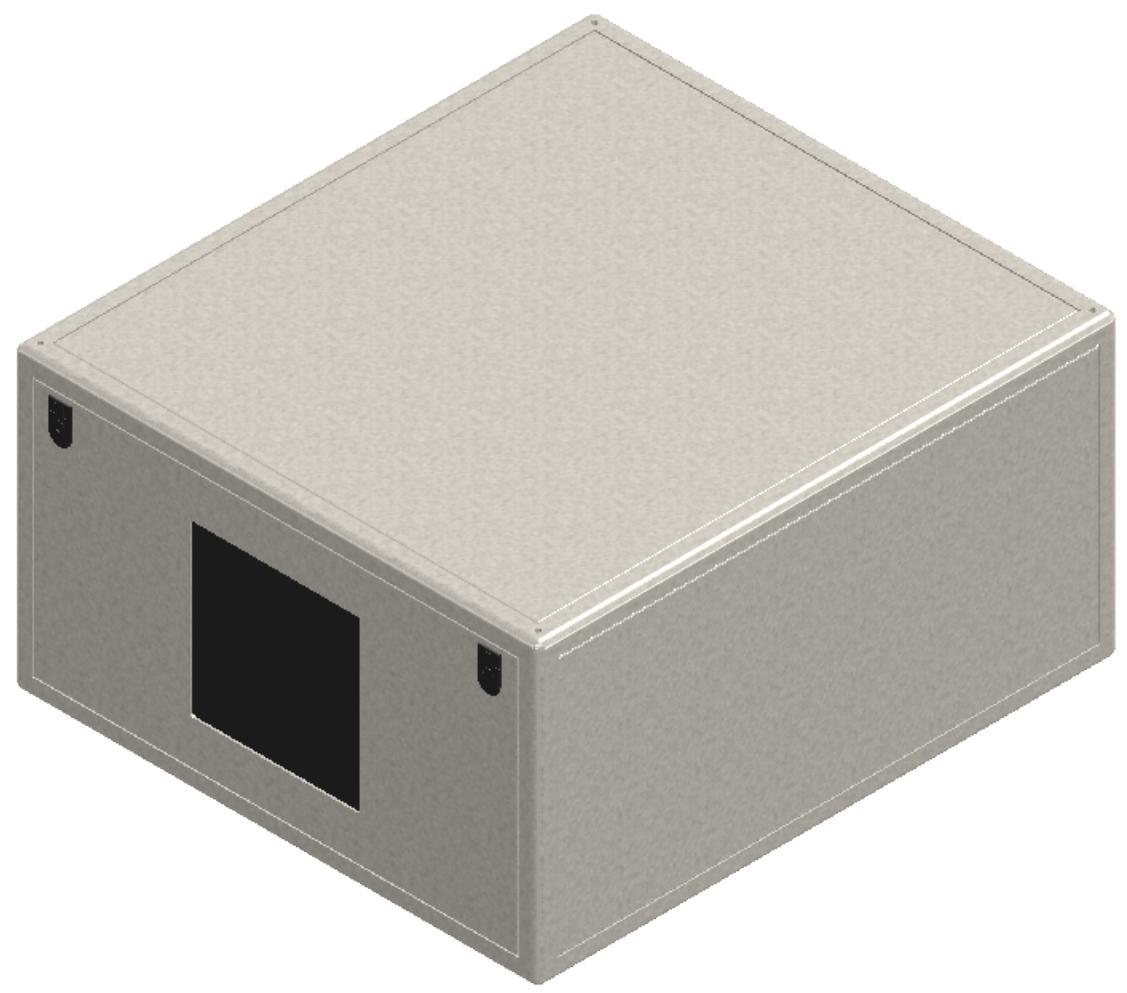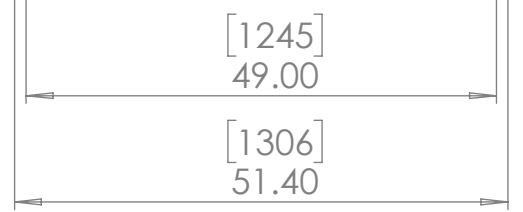

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±  
ANGULAR: MACH ± BEND ±  
TWO PLACE DECIMAL ±  
THREE PLACE DECIMAL ±  
INTERPRET GEOMETRIC TOLERANCING PER:  
MATERIAL  
Aluminum & SS  
FINISH  
Lt Bronze  
DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	TB	12/9/2016
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		



TITLE:  
Cyclone G4 for Epson L25000U

SIZE	DWG. NO.	REV
<b>B</b>	55.250.L.xx	01

SCALE: 1:20 SHEET 1 OF 1

8 7 6 5 4 3 2 1

A